

PATENT ABSTRACTS OF JAPAN

(11)Publication number : **63-062528**
 (43)Date of publication of application : **18.03.1988**

(51)Int.Cl. **B01D 53/34**
// F23G 5/02
H01L 21/205


(21)Application number :	61-205883	(71)Applicant :	SHINDENGEN ELECTRIC MFG CO LTD YAMANASHI DENSHI KOGYO KK
(22)Date of filing :	03.09.1986	(72)Inventor :	WAKATABE MASARU FUJIMORI KENICHI OGINO OSAMU TAKEI MITSURU

(54) DISCHARGE GAS TREATING DEVICE

(57)Abstract:

PURPOSE: To prevent solid fine particles generated by combustion from sticking to pipe wall, etc., by providing a connecting liquid-streaming part of washing liquid to the inner wall of a gas introducing pipe introducing a discharge gas containing a spontaneous ignition toxic gas to a combustion chamber.

CONSTITUTION: A double pipe structure 7 is provided with numerous spouting openings to an area of a certain length (l) from the open end 5a of the discharge gas introducing pipe 5 which introduces a gas containing a spontaneous ignition toxic gas, such as silane gas, discharged from a semiconductor manufacturing process to a shower washing chamber 8 used also as a combustion chamber. SiH₄, etc., are spontaneously ignited by bringing into contact with air, and fine particles of

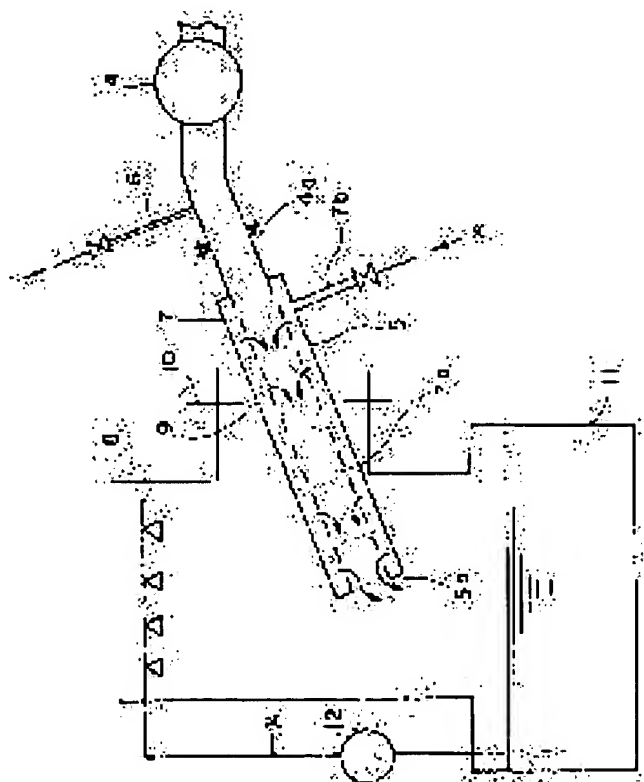

SiO₂, etc., produced by combustion are always washed out by a washing liquid, such as an alkaline aqueous solution, along all the inner peripheral surface of the introducing pipe 5, and, as a result, the clogging of the open end 5a is surely prevented.